

QTA602 STEREO MIXER PRE-AMP



Features

- 2 balanced XLR mic inputs with phantom power & gain control
- 4 unbalanced RCA stereo line inputs with gain control
- Stereo balanced line level XLR outputs
- Alarm input
- Unbalanced REC output
- Switchable Input priority: Alarm input, Mic1/ Mic2 & Line 1-4 inputs.
- Bass/treble tone control and volume control for Mic1, Mic2 & source
- Dual Master volume control for both left and right channel
- Separate Output level meters for both left and right channels
- AC input voltage selector of 115V and 230V


Specifications

Input	MIC 1-2: 4 mV -45 mV /600Ω , balanced MIC 1-2(LINE): 150mV-1.5V/10KΩ, balanced LINE 1, 2, 3, 4: 250 mV -2.5V/10KΩ, unbalanced
Output	1V/600Ω
Freq. Response	20Hz-20KHz(1dB)
S/N Ratio	Mic input: 65dB; Line input: 85dB
Tone	Bass: ± 10dB at 100Hz Treble: ± 10dB at 10KHz
Phantom Power	+48V
Protection	AC fuse
Power Supply	115V and 230V voltage selector
Dimensions	484x209x44mm
Weight	3.9Kg




Q-Tech Commercial Series

Rear Panel

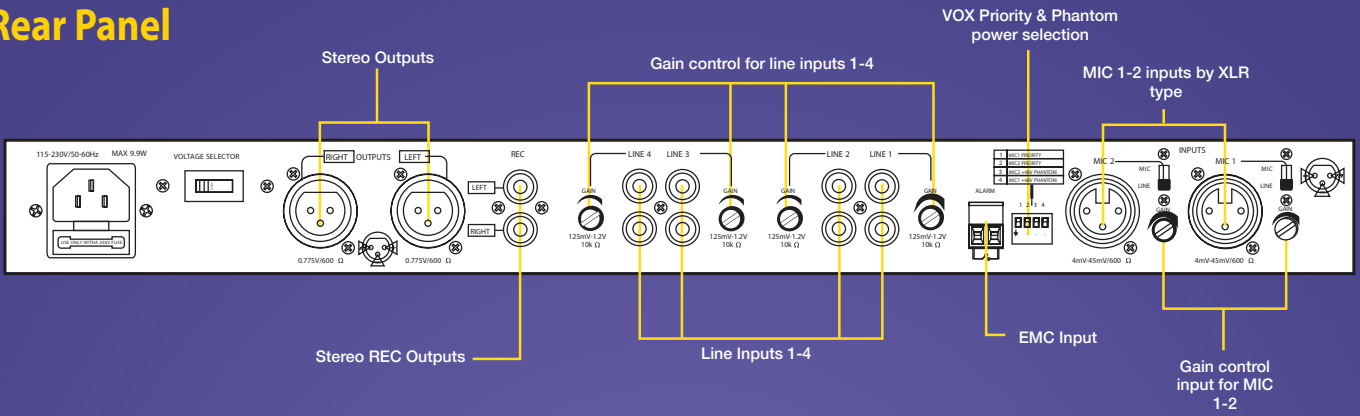

Connections

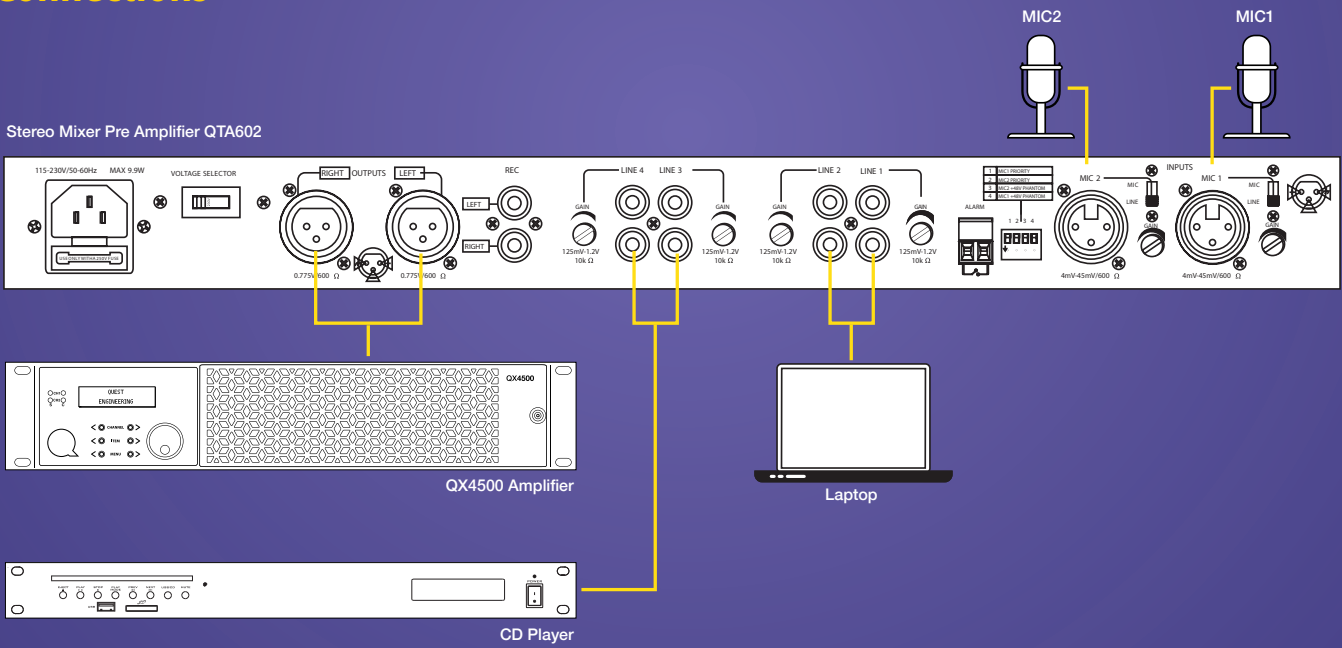

Q-Tech Commercial Series

